

USGS Report No. OSL/2933



United States Department of the Interior

U.S. GEOLOGICAL SURVEY
Reston, Virginia 20192

REPORT OF CALIBRATION of Aerial Mapping Camera

March 27, 2003

| | | | |
|-----------------------|-----------------------------|--------------------|-------|
| Camera type: | Wild RC30* | Camera serial no.: | 5364 |
| Lens type: | Wild Universal Aviogon /4-S | Lens serial no.: | 13411 |
| Nominal focal length: | 153 mm | Maximum aperture: | f/4 |
| | | Test aperture: | f/4 |

Submitted by: Tuck Engineering, Inc.
Big Stone Gap, Virginia

Reference: XX
XX

These measurements were made on Kodak Micro-flat glass plates, 0.25 inch thick, with spectroscopic emulsion type 157-01 Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 153.240 mm

II. Lens Distortion

| Field angle: | 7.5° | 15° | 22.7° | 30° | 35° | 40° |
|-----------------------|------|-----|-------|-----|-----|-----|
| Symmetric radial (um) | 0 | 0 | 1 | 2 | 1 | -1 |
| Decentering (um) | 0 | 1 | 1 | 3 | 4 | 5 |

Symmetric radial distortion parameters

$$\begin{aligned} K_0 &= 0.4213 \times 10^{-5} \\ K_1 &= -0.5536 \times 10^{-8} \\ K_2 &= 0.3593 \times 10^{-12} \\ K_3 &= 0.0000 \\ K_4 &= 0.0000 \end{aligned}$$

Decentering distortion parameters

$$\begin{aligned} P_1 &= -0.3369 \times 10^{-7} \\ P_2 &= 0.3277 \times 10^{-6} \\ P_3 &= 0.0000 \\ P_4 &= 0.0000 \end{aligned}$$

Calibrated principal point

$$\begin{aligned} x_p &= 0.002 \text{ mm} \\ y_p &= -0.010 \text{ mm} \end{aligned}$$

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

USGS Report No. OSL/2933

III. Lens Resolving Power in cycles/mm

Area-weighted average resolution: 105

| Field angle: | 0° | 7.5° | 15° | 22.7° | 30° | 35° | 40° |
|------------------|-----|------|-----|-------|-----|-----|-----|
| Radial Lines | 113 | 134 | 113 | 134 | 113 | 95 | 95 |
| Tangential lines | 113 | 134 | 113 | 113 | 113 | 80 | 80 |

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

IV. Filter Parallelism

The two surfaces of the Wild 420 filter No. 7025 and 525 filter No. 7569 accompanying this camera are within 10 seconds of being parallel. The 525 filter was used for the calibration.

V. Shutter Calibration

| Indicated time (sec) | Rise time (μ sec) | Fall Time (μ sec) | $\frac{1}{2}$ width time (ms) | Nom. Speed (sec.) | Efficiency (%) |
|-------------------------|---------------------------|---------------------------|----------------------------------|----------------------|-------------------|
| 1/125 | 1760 | 1756 | 8.22 | 1/140 | 87 |
| 1/250 | 869 | 871 | 4.20 | 1/270 | 87 |
| 1/500 | 457 | 455 | 2.17 | 1/530 | 87 |
| 1/1000 | 232 | 232 | 1.10 | 1/1050 | 87 |

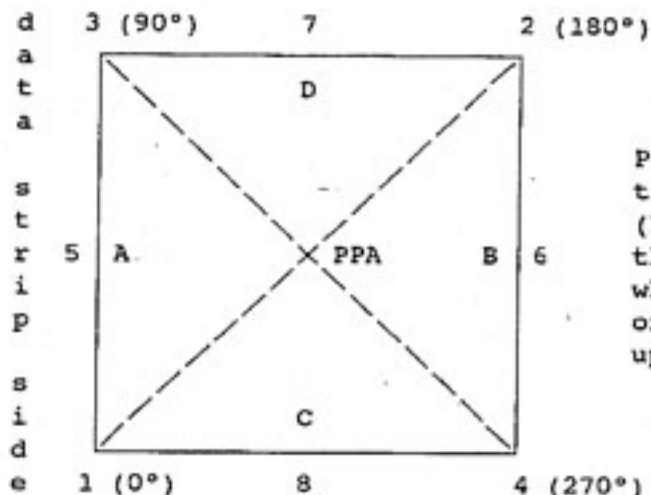
The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is Method I described in American National Standard PH3.48-1972(R1978).

VI. Film Platen

The film platen mounted in Wild RC30 drive unit No. 5364-739 does not depart from a true plane by more than 13 μ m (0.0005 in).

This camera is equipped with a platen identification marker that will register "739" in the data strip area for each exposure.

USGS Report No. OSL/2933

VII. Principal Points and Fiducial Coordinates

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

| | <u>X coordinate</u> | <u>Y coordinate</u> |
|---|---------------------|---------------------|
| Indicated principal point, corner fiducials | 0.002 mm | 0.000 mm |
| Indicated principal point, midside fiducials | -0.002 | 0.001 |
| Principal point of autocollimation (PPA) | 0.0 | 0.0 |
| Calibrated principal point (pt. of sym.) x_p, y_p | 0.002 | -0.010 |

Fiducial Marks

| | | |
|---|-------------|-------------|
| 1 | -106.002 mm | -105.998 mm |
| 2 | 106.001 | 105.994 |
| 3 | -105.994 | 105.998 |
| 4 | 105.997 | -105.998 |
| 5 | -111.996 | 0.003 |
| 6 | 112.000 | -0.002 |
| 7 | 0.001 | 111.995 |
| 8 | -0.005 | -111.998 |

VIII. Distances Between Fiducial Marks

Corner fiducials (diagonals)

1-2: 299.809 mm 3-4: 299.805 mm

Lines joining these markers intersect at an angle of 90° 00' 03"

Midside fiducials

5-6: 223.996 mm 7-8: 223.993 mm

Lines joining these markers intersect at an angle of 89° 59' 59"

Corner fiducials (perimeter)

1-3: 211.996 mm 2-3: 211.996 mm

1-4: 211.999 mm 2-4: 211.992 mm

The method of measuring these distances is considered accurate within 0.003 mm

Note: For GPS applications, the nominal entrance pupil distance from the focal plane is 277 mm.

USGS Report No. OSL/2933

IX. Stereomodel Flatness

FMC Drive Unit No.: 5364-739

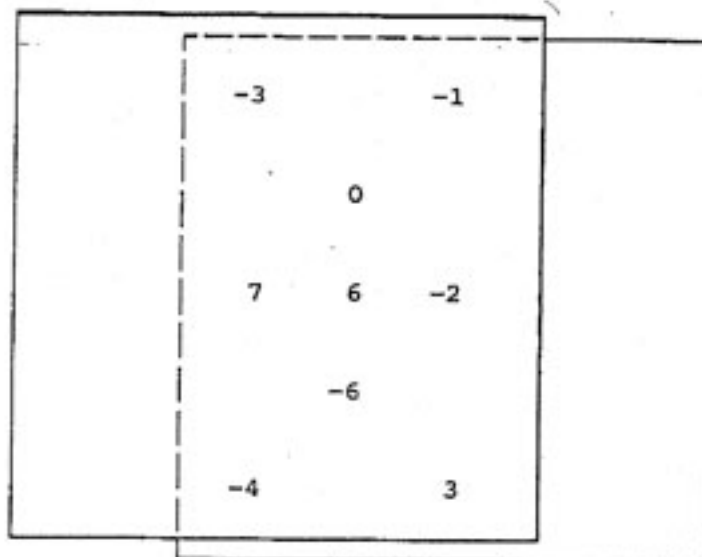
Base/Height ratio: 0.6

Platen ID: 739

Maximum angle of field tested: 40°

d
a
t
a

s
t
r
i
p

s
i
d
e

Stereomodel
Test point array
(values in micrometers)

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereo models. The values are based on comparator measurements on Kodak 4425 copy film made from Kodak 2405 film exposures. These measurements can vary by as much as $\pm 5 \mu\text{m}$ from model to model.

X. System Resolving Power on film in cycles/mm

Area-weighted average resolution: 50

Film: Type 2405

| Field angle: | 0° | 7.5° | 15° | 22.7° | 30° | 35° | 40° |
|------------------|----|------|-----|-------|-----|-----|-----|
| Radial Lines | 57 | 57 | 57 | 57 | 57 | 48 | 48 |
| Tangential lines | 57 | 57 | 48 | 48 | 48 | 48 | 40 |

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/2918, dated March 17, 2003.

Gregory I. Snyder
Commercial Remote Sensing Project Manager
National Mapping Division